

INTRODUCTION

The AW-FET-060D-065 is a 4xFE PoE + 2xFE UTP unmanaged PoE switch capable of feeding 15.4/30W power to Power over Ethernet (PoE) devices. The switch is capable of a total of 60 Watts power budget.

PACKAGE CONTENTS


| | |
|---|-------------------------------|
| * 1x PoE switch | * 1x Quick Installation Guide |
| * 1x power cord (type by the shipped-to area) | |

⚠ IMPORTANT:


1. Install the PoE switch in a ventilated and dry place, that is free from electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 6 UTP/STP cables.
4. AC input (100~240V/AC, 50~60Hz), for a max. consumption of 65W.

CONNECTION

Front Panel

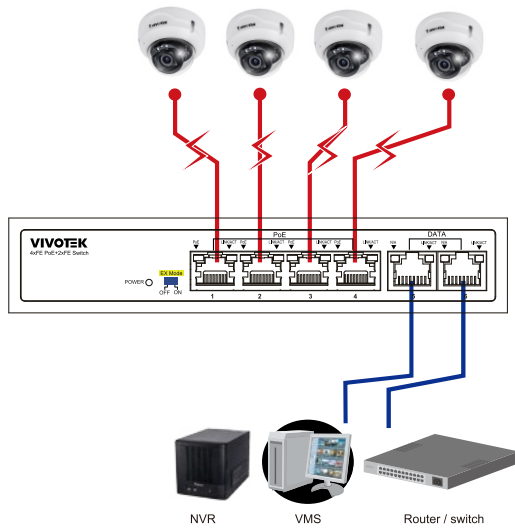

EX Mode

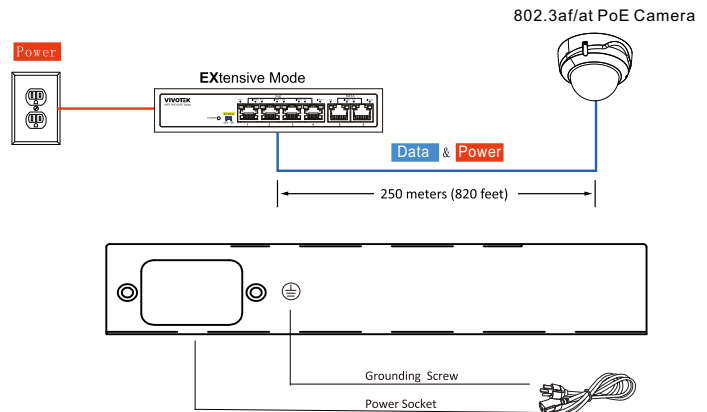

⚠ IMPORTANT:

The switch already comes with lightning protection mechanism. You should always ground the switch through the PE (Protecting Earth) cable of AC cord or with ground cable. Not grounding the power may cause the power input to damage the unit.

LED DEFINITIONS

| | | |
|-----------------|------------|--|
| POWER | Green ON | Power is on and normal. |
| | Green OFF | Power is off. |
| LINK/ACT | Green ON | Ethernet port is connected. |
| | Blinking | Data is being transmitted or received. |
| | Green OFF | No connection. |
| PoE | Orange ON | Port is linked to a powered device. |
| | Blinking | Abnormal power supply is detected |
| | Orange OFF | No device is connected. |

EXTENSIVE MODE DIP SWITCH

EX Mode OFF: normal communication between port 1~6.

EX Mode ON : The EX mode(Port 1 & 2), Up to 250m PoE distance allows you to expand you network via Ethernet cable to where there is no power line or outlet but where you want to fix device such as IP Camera.

- EX mode reaches 802.3af/at(15.4W/30W) camera up to 250m@10Mbps via EX PoE ports